

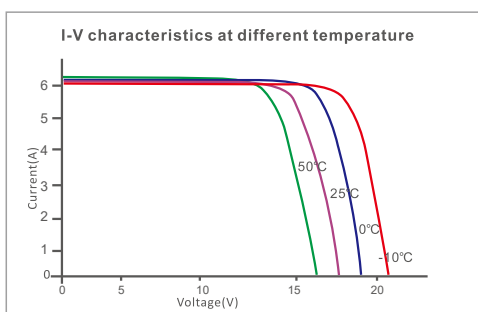


RSM-100P

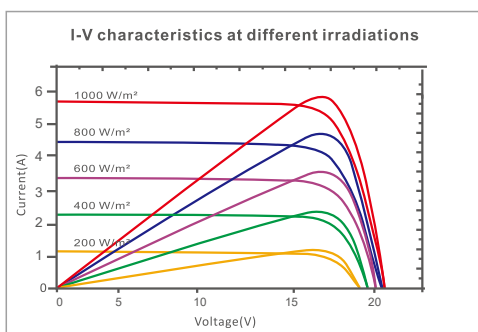

GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

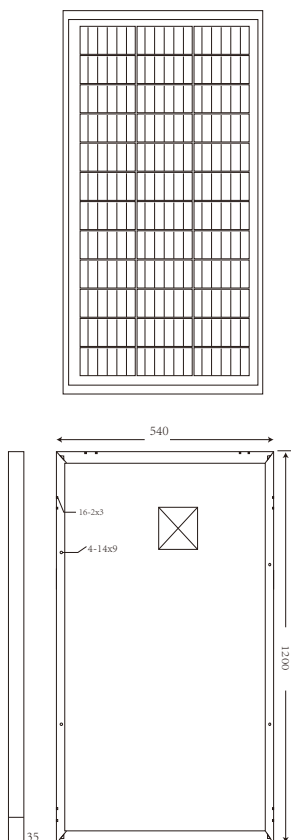

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	100W
Open Circuit Voltage-Voc(V)	21.58V
Short Circuit Current-Isc(A)	6.04A
Maximum Power Voltage-Vmp(V)	17.40V
Maximum Power Current-Imp(A)	5.75A
Module Efficiency (%)	15.44%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax (Wp)	73.6W
Open Circuit Voltage-Voc (V)	20.37V
Short Circuit Current-Isc (A)	4.93A
Maximum Power Voltage-Vmp(V)	16.85V
Maximum Power Current-Imp(A)	4.37A

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Poly-crystalline 156x91mm, 5 Bus bars
Cell configuration	36 cells(3x12)
Module dimensions	1200x540x35mm
Weight	7 Kgs
Front Cover	3.2 mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP65 or IP67, 6 Diodes
Cable	4mm ² (IEC)/12AWG(UL),900mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	4 pcs/carton

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1000V(IEC)/600V(UL)
Max Series Fuse Rating	10A
Limiting Reverse Current	10A

PACKAGING CONFIGURATION

	40HQ	20GP
Quantity in container	2184 pcs	1120 pcs
Package	4 pcs/carton	4 pcs/carton
Package Weight	35.5 kg/carton	35.5 kg/carton
Package Number	546 cartons	280 cartons
Package Dimension	1225*555*160 mm/carton	1225*555*160 mm/carton



WWW.RESUNSOLAR.COM




36 Cells
Poly-crystalline

100W
Power output

15.44%
The Highest Efficiency

0~+5W
Tolerance

**0.5% Annual Degradation
over 30 years**

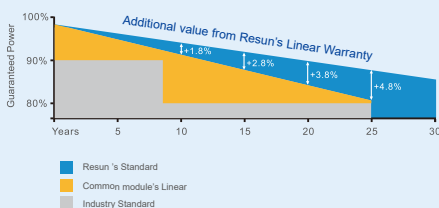

LINEAR PERFORMANCE WARRANTY
12 year Product Warranty / 30 year Linear Power Warranty

RSM-100P

RSM-100P is a robust solar module with 36 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Resun Solar's modules meet the highest quality standards possible.



High module conversion efficiency (up to 15.44%), through superior manufacturing technology



Guaranteed 0~+5W positive power output tolerance ensures high reliability



Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust



Excellent performance under low light environments (mornings, evenings and cloudy days)



Suitable for harsh environments, such as coasts, deserts and lakes. Withstand high level of wind loads (2400pa) and snow loads (5400pa)

Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716

