
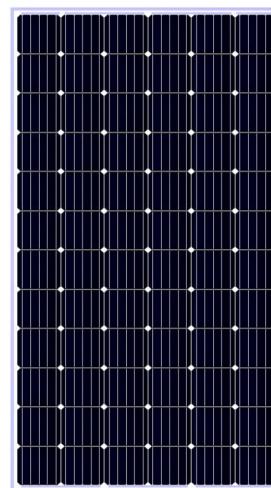


330W Mono solar panel (1956\*992\*40)

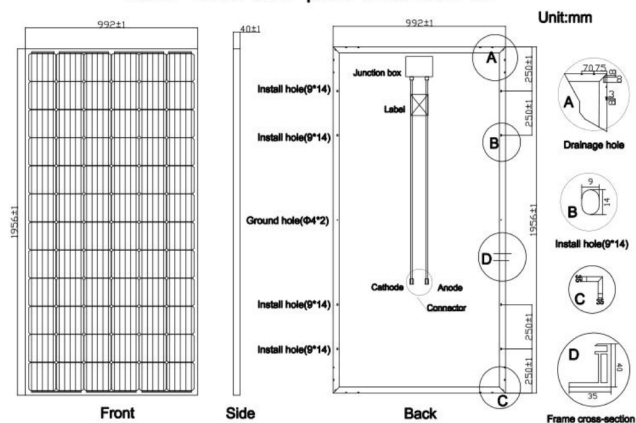

## Specifications

\* STC: irradiance 1000 W/m<sup>2</sup>, AM 1.5, and cell temperature of 25°C


|                            |        |
|----------------------------|--------|
| Peak Power(Pmax)           | 330.00 |
| Maximum Power Voltage(Vmp) | 37.36  |
| Maximum Power Current(Imp) | 8.84   |
| Open Circuit Voltage(Voc)  | 46.17  |
| Short Circuit Current(Isc) | 9.65   |
| Cells Efficiency( % )      | 18.75  |
| Module Efficiency( % )     | 17.00  |

\* NOCT: irradiance 800 W/m<sup>2</sup>, AM 1.5G, ambient temperature 20°C, wind speed 1 m/s

|                            |        |
|----------------------------|--------|
| Peak Power(Pmax)           | 245.00 |
| Maximum Power Voltage(Vmp) | 34.93  |
| Maximum Power Current(Imp) | 7.02   |
| Open Circuit Voltage(Voc)  | 42.79  |
| Short Circuit Current(Isc) | 7.69   |

|                                             |           |
|---------------------------------------------|-----------|
| Maximum System Voltage(V)                   | 1000/1500 |
| Maximum Series Fuse Rating(A)               | 20        |
| Power Tolerance                             | 0 ~ +3 %  |
| Pmax Temperature Coefficients(W/°C)         | -0.400 %  |
| Voc Temperature Coefficients(V/°C)          | -0.290 %  |
| Isc Temperature Coefficients(A/°C)          | +0.048 %  |
| NOCT Nominal Operating Cell Temperature(°C) | 47±2      |
| Operating and Storage Temperature(°C)       | -40 ~ +85 |

## Warranty

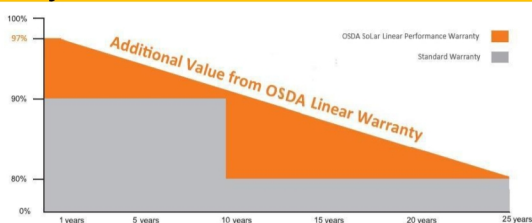

12 YEARS

Guarantee on product materail and workmanship



Linear Power output warranty



## Mechanical characteristics

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Cell Type         | 156.75x156.75 Mono                              |
| No. of Cells      | 72(6x12)                                        |
| Dimensions        | 1956x992x40                                     |
| Weight            | 22.5kg                                          |
| Front Glass       | 3.2mm high transmission,low iron,tempered glass |
| Frame             | Anodized Aluminium Alloy                        |
| Junction box      | IP65/IP67                                       |
| Output cables     | 4mm <sup>2</sup> cable 90cm+mc4                 |
| MaxWind Load/Snow | 2400Pa/5400Pa                                   |



## Packing list

|                |                     |
|----------------|---------------------|
| 20FT container | 12 Packages/ 296pcs |
| 40HQ container | 24 Packages/680PCS  |

## Product Standard


|                     |          |
|---------------------|----------|
| Product Performance | IEC61215 |
| Product Safety      | IEC61730 |

#### IV Cure

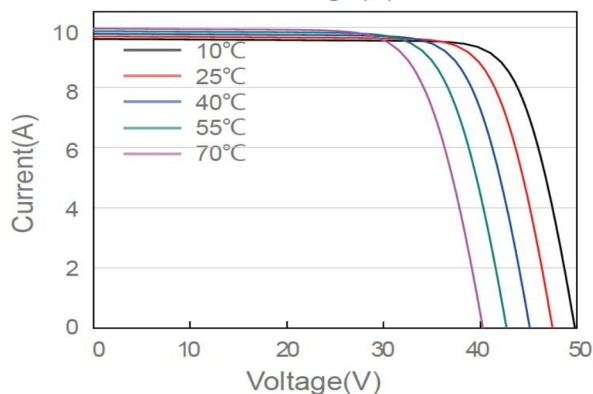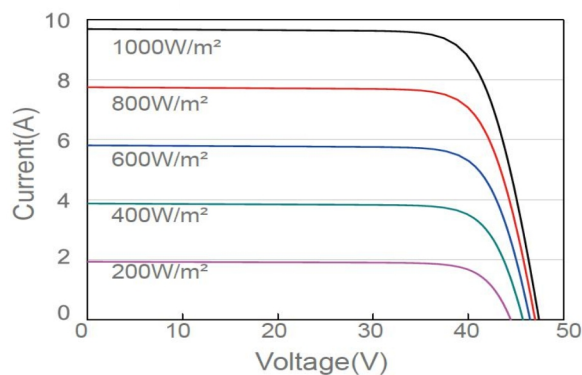

# 330W Mono solar panel (1956\*992\*40)


Unit:mm

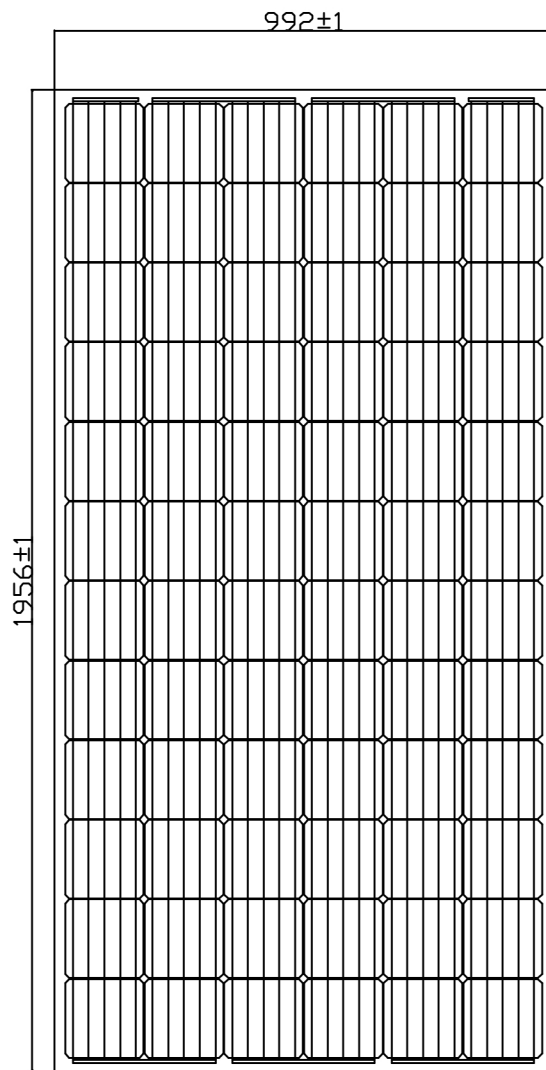


Front




Side

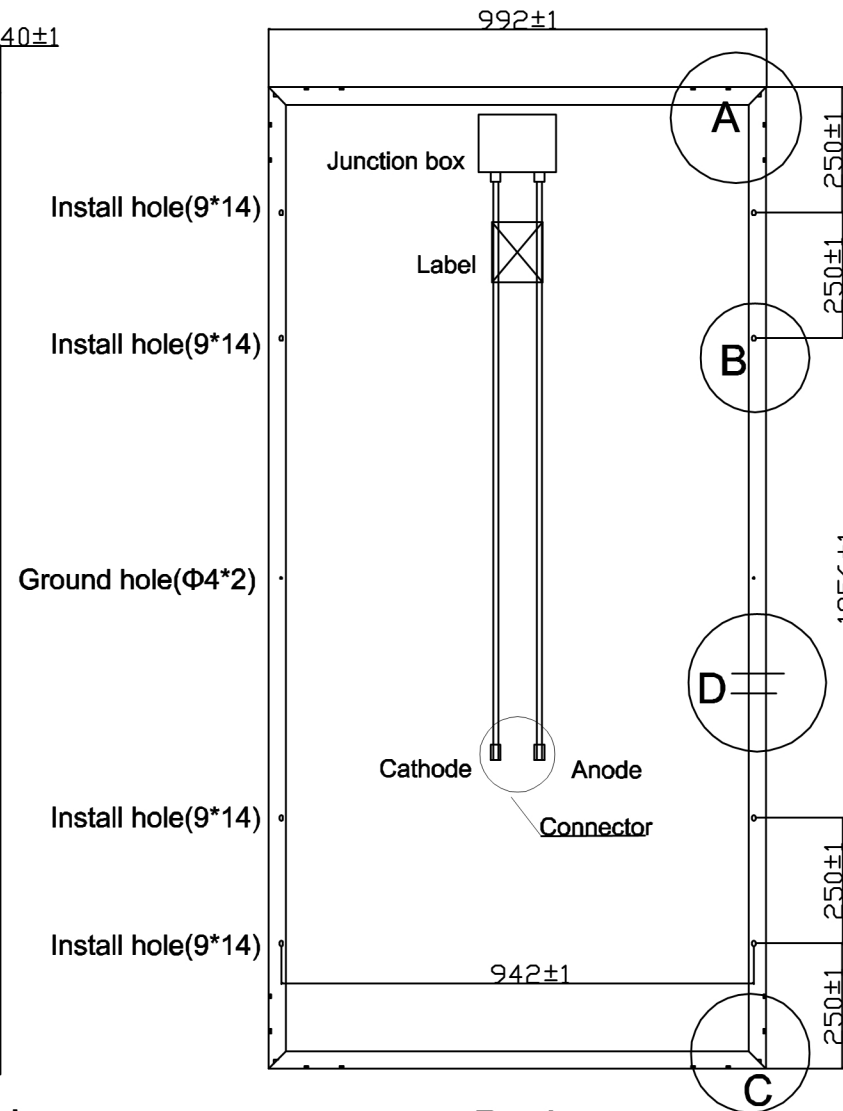



Back



Drainage hole



Install hole(9\*14)



Frame cross-section