



YL70C-18b

YL75C-18b

YL80C-18b



Warranty

5-year repair and workmanship warranty



12-year warranty at 90% power output

25-year warranty at 80% power output

Typical Electrical

Models	YL70C-18b	YL75C-18b	YL80C-18b
Power Tolerance (%)	±3	±3	±3
Max. Power (Pmax) (W)	70	75	80
Optimum Operating Voltage	17.85	18.18	18.79
Optimum Operating Current	3.92	4.13	4.26
Open-circuit Voltage (Voc/V)	21.78	22.64	23.07
Short-circuit Current (Isc/A)	4.34	4.45	4.51
Cells efficiency (%)	16.9	17.9	19.4

Note: the specifications are obtained under the Standard Test Condition (STC): 1,000W/m², Am 1.5, Cell Temperature 25°C

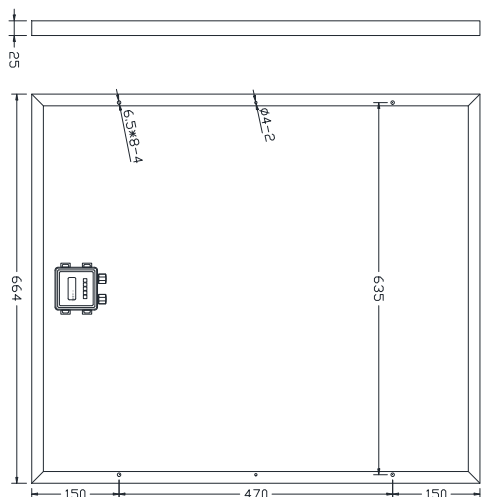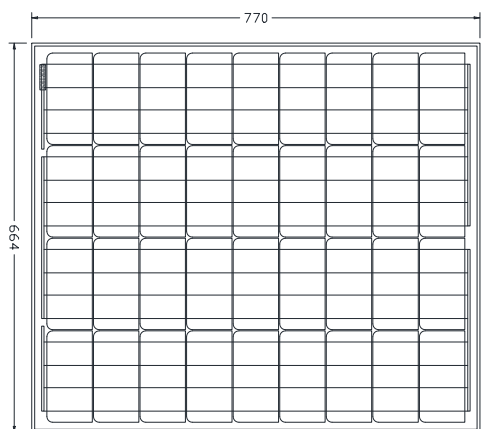

Mechanical Characteristics

Solar cell (mm)	Mono 156×78
No.of Cell and Connections	36 (4×9)
Dimension (L×W×H) (mm)	770×664×25
Weight (kg)	6.0 (approx)
Junction Box	IP65
Connector	N/A
Packaging Configuration	4pcs/cnt
Load Capacity	2000/ 40'GP

Working Conditions

Maximum System Voltage	DC 1000V (IEC)
Temperature cycling range	-40°C ~ +85°C
NOTC	47°C
Maximum Series Fuse	10 A
Application Class	Class A
Temperature coefficients of Isc	(+0.06%/°C)
Temperature coefficients of Voc	(-0.35%/°C)
Temperature coefficients of Pmax	(-0.4%/°C)